




## ProLINK 800 LE is a high performance, transparent transfer tape.

This tape is specially designed for heavy duty applications on smooth or textured, flat or curved surfaces. The highly crosslinked adhesive has high cohesive strength and provides good convertability. Because of the high thickness of the adhesive layer, the product offers excellent gap filling properties. It is perfect to bond a wide variety of materials, particularly high polar plastics, metals, glass, ceramics, powder coats etc.

The bonding strength increases over time and guarantees excellent bonding quality.

### ADHESION

in accordance to AFERA 4001

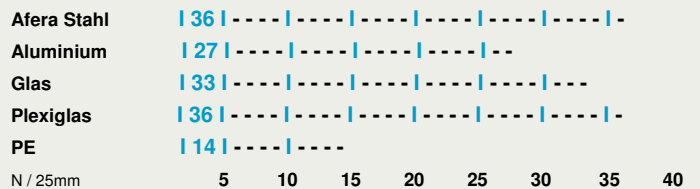

### COHESION

in accordance to AFERA 4012



### TAPECONSTRUCTION

Thickness  
of adhesive layer  
without liner  
approx. 0,80 mm

01

02



#### 01 / LINER

HDPE-Liner, 125µm, blue  
both sides siliconized

#### 02 / ADHESIVE LAYER

High performance adhesive based  
on polyacrylat  
Film thickness: 0,80 mm

The service temperature ranges from  
- 40°C to +120°C, short term even up to + 160°C

### STORAGE

This product should be stored at ambient temperatures of around 20°C, avoiding wide temperature fluctuations and direct sunlight. The storage environment should have a relative humidity of approx. 50%. In ideal storage conditions, the shelf life of this material will be approx. 12 months from the delivery date. Within this 12 month period, when stored correctly, there should be no deterioration of the products published performance specification.

All data above mentioned and technical information given above are typical values, gained from tests we believe to be reliable. Please ensure before using our product that it is suitable for the material for intend application. For technical assistance please call our product specialists. The data and statements are intended as asource of information, are given without gurantee and do not constitute a warranty. They can vary according to the application conditions. All materials described herein are subject to our conditions of sale, a copy is available on request.