

TransLINK 200 HP is a special designed adhesive for PVC bonding.

This tape is specially designed for heavy duty applications on smooth or textured, flat or curved surfaces. The adhesive has a perfect internal strength and shows good convertability.

The bonding strength increases over time and guarantees excellent bonding quality.

ADHESION

in accordance to AFERA 5001


steel	34	10	15	20	25	30	35
aluminium	32	10	15	20	25	30	35
glass	30	10	15	20	25	30	35
PMMA	29	10	15	20	25	30	35
PVC	30	10	15	20	25	30	35
PP	24	10	15	20	25	30	35
PE	11	10	15	20	25	30	35

COHESION

in accordance to AFERA 5012

20° C	60	20	40	60
70° C	20	40	60	

TAPE CONSTRUCTION

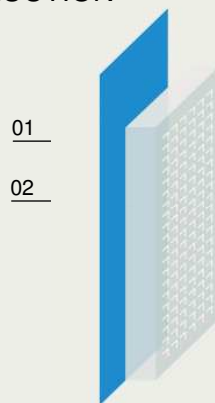

Tape thickness
approx. 0,20 mm
excl. liner

01 / LINER

PE- paper, white,
both sides siliconized,
weight: 120 g/m²

02 /ADHESIVE LAYER

Special designed acrylate,
weight: 200 g/m²

The service temperature ranges from
- 40 °C to + 120 °C, short term even up to +200 °C

STORAGE

This product should be stored at ambient temperatures of around 20°C, avoiding wide temperature fluctuations and direct sunlight. The storage environment should have a relative humidity of approx. 50%. In ideal storage conditions, the shelf life of this material will be approx. 12 months from the delivery date. Within this 12 month period, when stored correctly, there should be no deterioration of the products published performance specification.

Product use

All statements, technical info contained herein are based on lab testing, we believe to be reliable. In reality, many factors beyond our control can affect and influence the use and performance of our products in any particular application. Since these factors are uniquely within the users knowledge and control, it is essential that the user evaluate the product to determine its suitability for purpose. BIOLINK will not be liable for any loss or damage arising, whether direct or indirect, special, incidental or consequential.

All data above mentioned and technical information given above are typical values, gained from tests we believe to be reliable. Please ensure before using our product that it is suitable for the material for intended application. For technical assistance please call our product specialists. The data and statements are intended as a source of information, are given without guarantee and do not constitute a warranty. They can vary according to the application conditions. All materials described herein are subject to our conditions of sale, a copy is available on request.