

UniLINK 220 H+ is a double coated adhesive tape for all fixing and mounting applications with a carrier for dimensional stability.

## ADHESION

in accordance to AFERA 4001


Afera steel	28	5	10	15	20	25	30	35
aluminium	31							
glass	32							
PMMA	30							
PVC	26							
PP	28							
PE	10							
N / 25mm								

## COHESION

in accordance to AFERA 4012

20° C	45	0	10	20	30	40
70° C	10					
N / 625mm <sup>2</sup>						

## TAPECONSTRUCTION

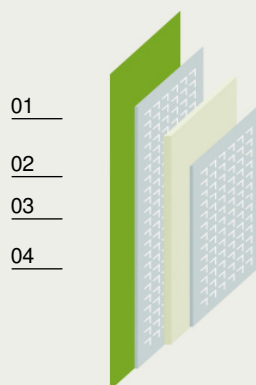

Thickness  
of tape  
without liner  
approx. 240µm

### 01 / LINER

Siliconpaper, 92g/m<sup>2</sup>, yellow  
both sides siliconized

### 02 / ADHESIVE

High performance adhesive based  
on polyacrylate  
Film thickness: 100 g/m<sup>2</sup>

### 03 / CARRIER

PVC-film; white  
thickness: 40µm

### 04 / ADHESIVE

High performance adhesive based  
on polyacrylate  
Film thickness: 100 g/m<sup>2</sup>

The service temperature ranges from  
- 40°C to +120°C, short term even up to + 150°C

## STORAGE

This product should be stored at ambient temperatures of around 20° C, avoiding wide temperature fluctuations and direct sunlight. The storage environment should have a relative humidity of approx. 50%. In ideal storage conditions, the shelf life of this material will be approx. 12 months from the delivery date. Within this 12 month period, when stored correctly, there should be no deterioration of the products published performance specification.

All data above mentioned and technical information given above are typical values, gained from tests we believe to be reliable. Please ensure before using our product that it is suitable for the material for intended application. For technical assistance please call our product specialists. The data and statements are intended as a source of information, are given without guarantee and do not constitute a warranty. They can vary according to the application conditions. All materials described herein are subject to our conditions of sale, a copy is available on request.