

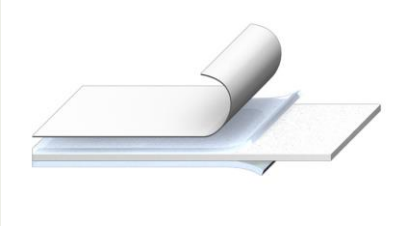
## foamlink 1107 h+

article no.: 3838

Version 01/ 13.05.2014

**foamlink 1107 h+ is a double coated foam tape with a modified acrylate adhesive.**

The closed cell, PE-foam carrier provides good conformability and is therefore ideal for use on both smooth and uneven or textured surfaces. The adhesive is a modified acrylic adhesive, that provides both good tack and good permanent bonding characteristics. It should be used for glass, metals and most plastics. The combination of adhesive and foam carrier is good for die cutting and converting.

<b>Tape Construction</b>		<p>PP-coex film, blue both sides siliconized, thickness: 80 µm</p> <p>Modified acrylate, coat weight: 70 g/m<sup>2</sup></p> <p>PE-foam, black thickness: 1,0 mm</p> <p>Modified acrylate, coat weight: 70 g/m<sup>2</sup></p>
<b>Tape Thickness</b>	<b>approx. 1,1 mm excl. liner</b>	
<b>Adhesion [N/25mm]</b> In accordance to AFERA 5001	<b>steel*</b> <b>10</b>	
* foam tear		
<b>Cohesion [N/625mm<sup>2</sup>]</b> In accordance to AFERA 5012	<b>20° C</b> <b>45</b>	
<b>Temperature Resistance</b>	<b>- 40°C to +70°C, short term even up to +90°C</b>	

**Storage.** This product should be stored at ambient temperatures of around 20°C, avoiding wide temperature fluctuations and direct sunlight. The storage environment should have a relative humidity of approx. 50%. In ideal storage conditions, the shelf life of this material will be approx. 12 months from the delivery date. Within this 12 month period, when stored correctly, there should be no deterioration of the products published performance specification.

**Product use.** All statements, technical info contained herein are based on lab testing, we believe to be reliable. In reality, many factors beyond our control can affect and influence the use and performance of our products an any particular application. Since these factors are uniquely witin the users knowledge and control, it is essential that the user evaluate the product to determine its suitability for purpose. Biolink will not be liable for any loss or damage arising, whether direct or indirect, special, incidental or consequential.

All data above mentioned and technical information given above are typical values, gained from tests we believe to be reliable. Please ensure before using. Our product that it is suitable for the material for intend application. For technical assistance please call our product specialists. The data and statements are Intended as asource of information, are given without gurantee and do not constitute a warranty. They can vary according to the application conditions. All materials described herein are subject to our conditions of sale, a copy is available on request.