

unilink 220 h+

article no.: 2914


Version 01/ 16.12.2015

unilink 220 h+ is a double sided adhesive tape with a PVC film carrier.

The solution for laminating a variety of substrates with smooth and rough or structured surfaces.

The pvc based carrier guarantees a good dimensional stability.

Tape Construction

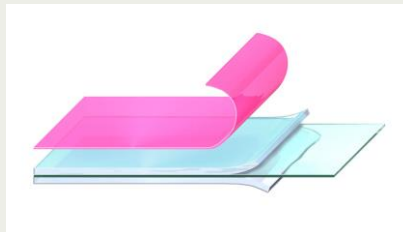

Siliconpaper, yellow,
both sides silicone coated,
weight: 90 g/m²
thickness: 70µm

modified acrylate
coat weight: 100 g/m²

PVC film, white
thickness: 40 µm

modified acrylate
coat weight: 100 g/m²

Tape Thickness

approx. 0,24 mm excl. liner

Elongation at break [%]

60

Tensile strength [N/25mm]

71

Adhesion [N/25mm]

In accordance to AFERA 5001

	initial				after 14days			
steel	32	PMMA	30	steel	42	PVC	38	
aluminium	31	PVC	26	aluminium	42	PP	36	
glass	32	PP	24	PET	39	PE	19	
PET	32	PE	10	PC	34			
PC	27	ABS	30	ABS	35			

Cohesion [N/625mm²]

In accordance to AFERA 5012

20° C 45

Temperature Resistance

-40°C to +70°C, short term even up to +90°C

Storage. This product should be stored at ambient temperatures of around 20°C, avoiding wide temperature fluctuations and direct sunlight. The storage environment should have a relative humidity of approx. 50%. In ideal storage conditions, the shelf life of this material will be approx. 12 months from the delivery date. Within this 12 month period, when stored correctly, there should be no deterioration of the products published performance specification.

Product use. All statements, technical info contained herein are based on lab testing, we believe to be reliable. In reality, many factors beyond our control can affect and influence the use and performance of our products an any particular application. Since these factors are uniquely witin the users knowledge and control, it is essential that the user evaluate the product to determine its suitability for purpose. Biolink will not be liable for any loss or damage arising, whether direct or indirect, special, incidental or consequential.

All data above mentioned and technical information given above are typical values, gained from tests we believe to be reliable. Please ensure before using. Our product that it is suitable for the material for intend application. For technical assistance please call our product specialists. The data and statements are Intended as asource of information, are given without gurantee and do not constitute a warranty. They can vary according to the application conditions. All materials described herein are subject to our conditions of sale, a copy is available on request.